

**4A 220KHz 36V Buck LED Constant Current Driver****XL3003****Features**

- Wide 8V to 36V Input Voltage Range
- Output Current Sense Voltage is 0.21V
- Maximum Duty Cycle 100%
- Minimum Drop Out 0.3V
- Fixed 220KHz Switching Frequency
- 4A Constant Output Current Capability
- Internal Optimize Power MOSFET
- High efficiency
- Excellent line and load regulation
- Built in thermal shutdown function
- Built in current limit function
- Built in output short protection function
- Available in TO-252 package

**Applications**

- Buck constant current driver
- Monitor LED Backlighting
- General purpose LED lighting

**General Description**

The XL3003 is a 220 KHz fixed frequency PWM buck (step-down) LED constant current driver, capable of driving a 4A load with high efficiency, low ripple and excellent line and load regulation. Requiring a minimum number of external components, the regulator is simple to use and include internal frequency compensation and a fixed-frequency oscillator.

The PWM control circuit is able to adjust the duty ratio linearly from 0 to 100%. An over current protection function is built inside. When short protection function happens, the operation frequency will be reduced from 220KHz to 60KHz. An internal compensation block is built in to minimize external component count.



Figure1. Package Type of XL3003

**Pin Configurations**

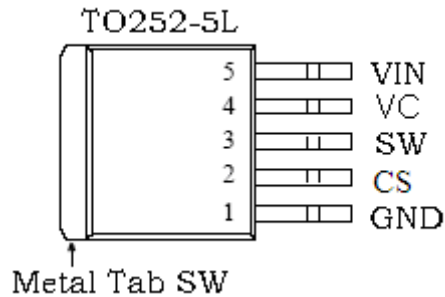


Figure2. Pin Configuration of XL3003 (Top View)

Table 1 Pin Description

| Pin Number | Pin Name | Description  |
|------------|----------|--|
| 1          | GND      | Ground Pin. Care must be taken in layout. This pin should be placed outside of the Schottky Diode to output capacitor ground path to prevent switching current spikes from inducing voltage noise into XL3003. |
| 2          | CS       | Output constant current sense Pin (CS). The CS reference voltage is 0.21V.   |
| 3          | SW       | Power Switch Output Pin (SW). SW is the switch node that supplies power to the output.   |
| 4          | VC       | Internal Voltage Regulator Bypass Capacity. In typical system application, The VC pin connect a 1uf capacity to VIN.   |
| 5          | VIN      | Supply Voltage Input Pin. XL3003 operates from a 8V to 36V DC voltage. Bypass Vin to GND with a suitably large capacitor to eliminate noise on the input.  |

**4A 220KHz 36V Buck LED Constant Current Driver**

**XL3003**

**Function Block**

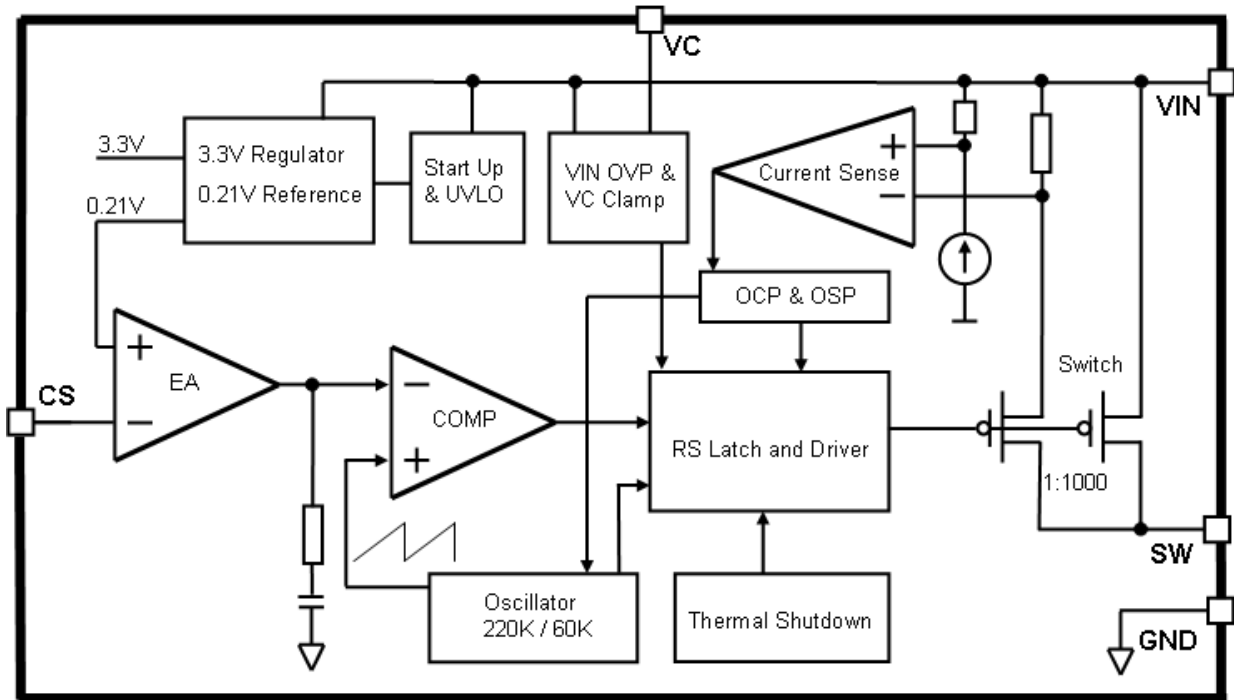


Figure3. Function Block Diagram of XL3003

**Typical Application Circuit**

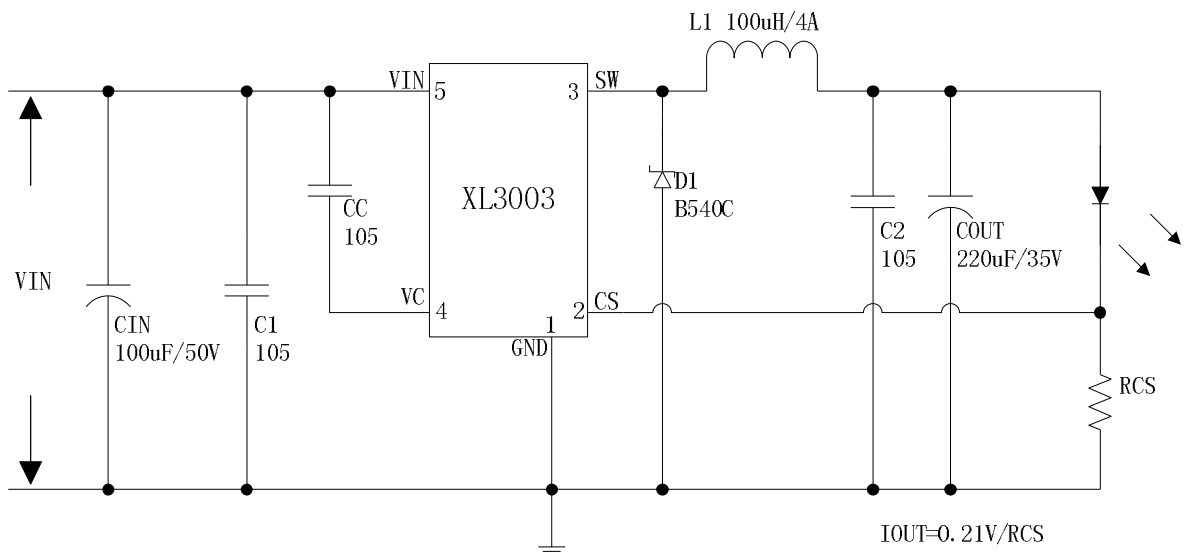


Figure4. XL3003 Typical Application Circuit

**4A 220KHz 36V Buck LED Constant Current Driver**

**XL3003**

**Ordering Information**

|                   |            |              |                           |
|-------------------|------------|--------------|---------------------------|
| Order Information | Marking ID | Package Type | Packing Type Supplied As  |
| XL3003E1          | XL3003E1   | TO252-5L     | 2500 Units on Tape & Reel |

XLSEMI Pb-free products, as designated with “E1” suffix in the par number, are RoHS compliant.

**Absolute Maximum Ratings (Note1)**

| Parameter  | Symbol              | Value                   | Unit |
|--|---------------------|-------------------------|------|
| Input Voltage  | V <sub>in</sub>     | -0.3 to 40              | V    |
| CS Pin Voltage   | V <sub>CS</sub>     | -0.3 to V <sub>in</sub> | V    |
| Output Switch Pin Voltage  | V <sub>Output</sub> | -0.3 to V <sub>in</sub> | V    |
| Power Dissipation  | P <sub>D</sub>      | Internally limited      | mW   |
| Thermal Resistance (TO252)<br>(Junction to Ambient, No Heatsink, Free Air) | R <sub>JA</sub>     | 50                      | °C/W |
| Maximum Junction Temperature   | T <sub>J</sub>      | -40 to 150              | °C   |
| Operating Junction Temperature   | T <sub>J</sub>      | -40 to 125              | °C   |
| Storage Temperature  | T <sub>STG</sub>    | -65 to 150              | °C   |
| Lead Temperature (Soldering, 10 sec)                                       | T <sub>LEAD</sub>   | 260                     | °C   |
| ESD (HBM)  |                     | >2000                   | V    |

**Note1:** Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## 4A 220KHz 36V Buck LED Constant Current Driver

## XL3003

### XL3003 Electrical Characteristics

$T_a = 25^\circ\text{C}$ ; unless otherwise specified.

| Symbol  | Parameter             | Test Condition   | Min.  | Typ. | Max.  | Unit |
|---|-----------------------|--|-------|------|-------|------|
| <i>System parameters test circuit figure4</i> |                       |  |       |      |       |      |
| VCS   | Current Sense Voltage | $V_{in} = 8\text{V to } 36\text{V}, V_{out}=6.4\text{V}$<br>$I_{load}=0.1\text{A to } 3\text{A}$ | 203.7 | 210  | 216.3 | mV   |
| $\eta$  | Efficiency            | $V_{in}=12\text{V}, V_{out}=10\text{V}$<br>$I_{out}=0.3\text{A}$                                 | -     | 95   | -     | %    |
| $\eta$  | Efficiency            | $V_{in}=24\text{V}, V_{out}=16\text{V}$<br>$I_{out}=1\text{A}$                                   | -     | 96   | -     | %    |
| $\eta$  | Efficiency            | $V_{in}=36\text{V}, V_{out}=19\text{V}$<br>$I_{out}=1\text{A}$                                   | -     | 95   | -     | %    |

### Electrical Characteristics (DC Parameters)

$V_{in} = 12\text{V}$ ,  $GND=0\text{V}$ ,  $V_{in}$  &  $GND$  parallel connect a  $100\mu\text{f}/50\text{V}$  capacitor;  $I_{out}=500\text{mA}$ ,  $T_a = 25^\circ\text{C}$ ; the others floating unless otherwise specified.

| Parameters               | Symbol         | Test Condition   | Min. | Typ. | Max. | Unit |
|--------------------------|----------------|--|------|------|------|------|
| Input operation voltage  | $V_{in}$       |  | 8    |      | 36   | V    |
| VIN UVLO                 | $V_{in\_uvlo}$ |  |      | 5    |      | V    |
| Quiescent Supply Current | $I_q$          | $V_{CS}=V_{in}$  |      | 2.1  | 5    | mA   |
| Oscillator Frequency     | $F_{osc}$      |  | 187  | 220  | 253  | KHz  |
| Output Short Frequency   | $F_{osp}$      |  | 48   | 60   | 72   | KHz  |
| Switch Current Limit     | $I_L$          | $V_{CS}=0$   |      | 6    |      | A    |
| Max. Duty Cycle          | $D_{MAX}$      | $V_{CS}=0\text{V}$   |      | 100  |      | %    |
| Output Power PMOS        | $R_{dson}$     | $V_{CS}=0\text{V}, V_{in}=12\text{V},$<br>$I_{sw}=4\text{A}$ |      | 60   | 80   | mohm |

**Typical System Application (Recommend output voltage safe work range)**

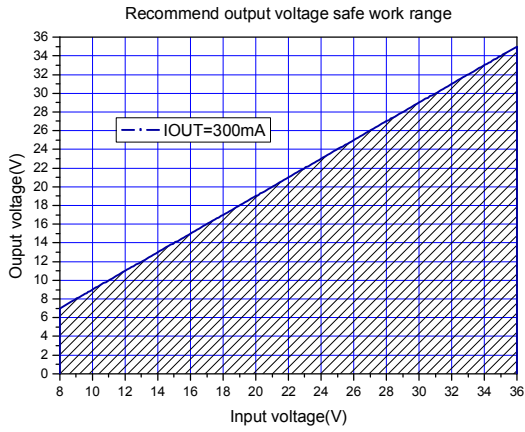


Figure5.Max output voltage(IOUT=300mA)

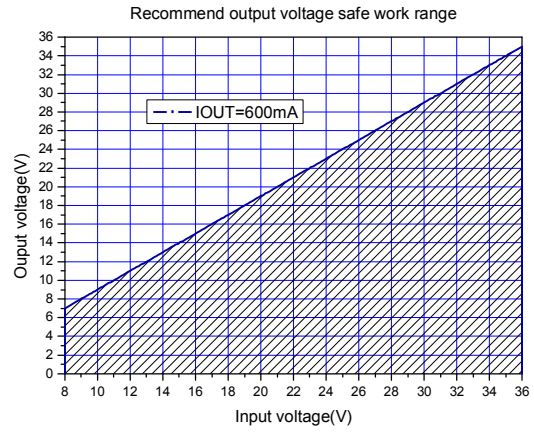


Figure6.Max output voltage(IOUT=600mA)

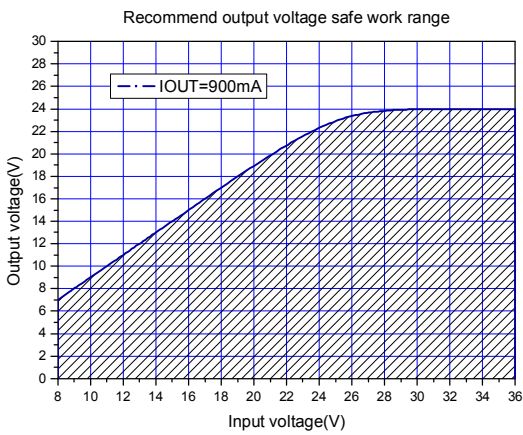


Figure7.Max output voltage(IOUT=900mA)

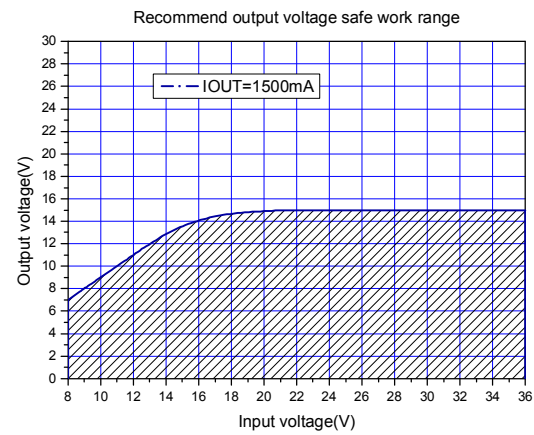


Figure8.Max output voltage(IOUT=1500mA)

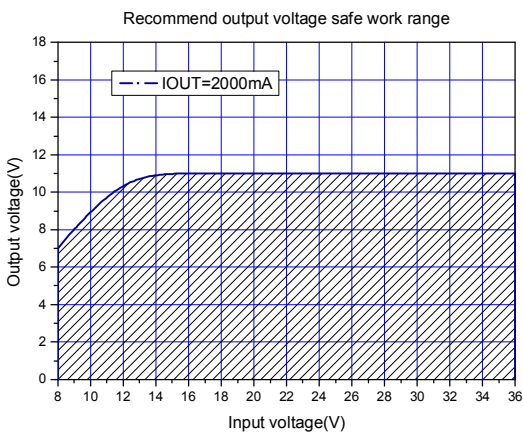


Figure9.Max output voltage(IOUT=2000mA)

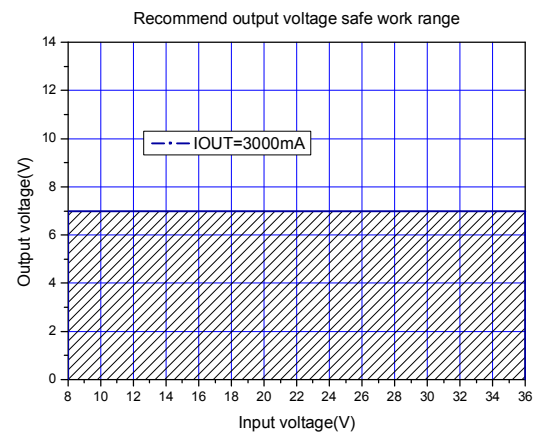


Figure10.Max output voltage(IOUT=3000mA)

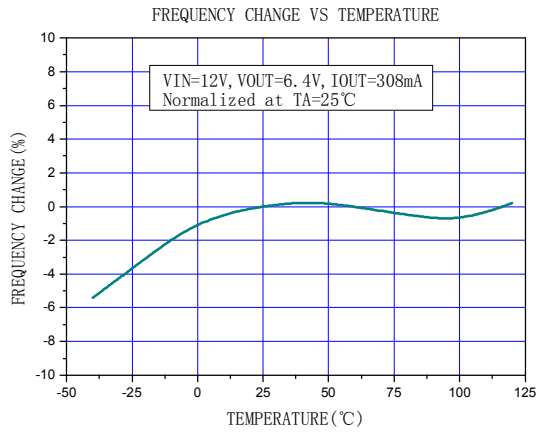


Figure11. Frequency change Curve

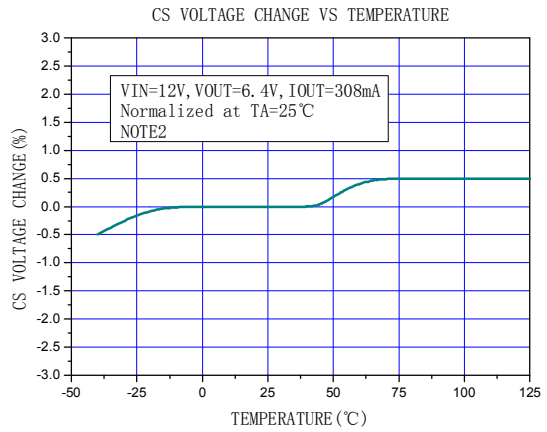


Figure12. CS Voltage change Curve

**Note2:** Internal temperature compensation circuitry is provided to compensation the PCB and external line loss in system application. When the junction temperature or the output power rise, the CS voltage will be compensated. This function is provided to compensation the PCB and external line loss in system application.

**4A 220KHz 36V Buck LED Constant Current Driver** **XL3003**

**Typical System Application (VIN=8V~36V, IOU=308mA)**

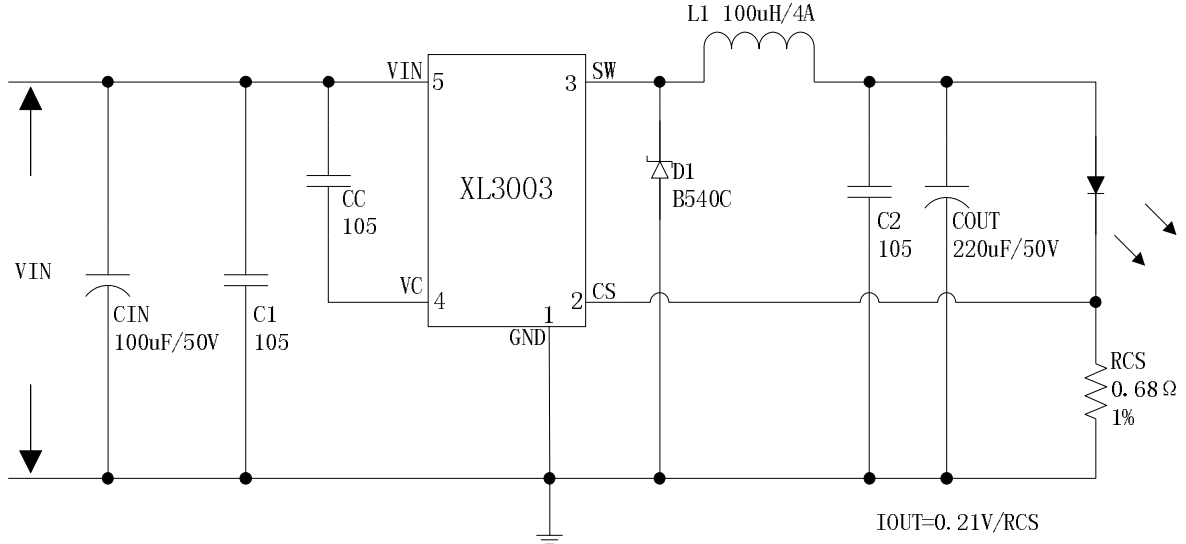


Figure13. XL3003 System Parameters Test Circuit (VIN=8V~36V, IOU=308mA)

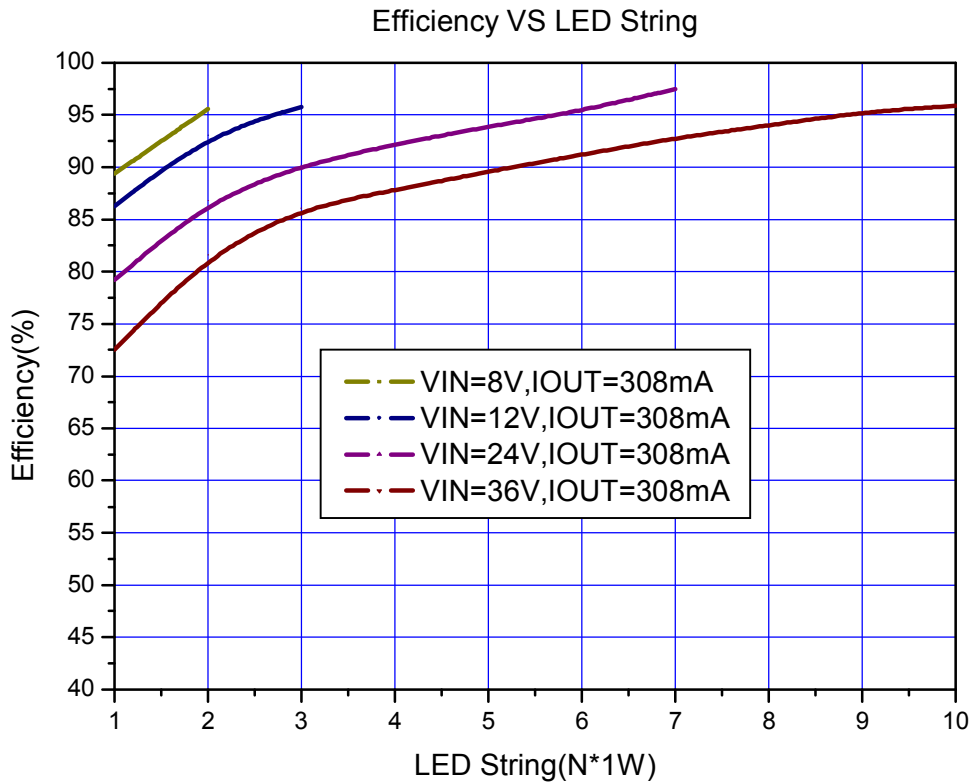


Figure14. XL3003 System Efficiency Curve



**4A 220KHz 36V Buck LED Constant Current Driver** **XL3003**

**Typical System Application (VIN=8V~36V, IOU=615mA)**

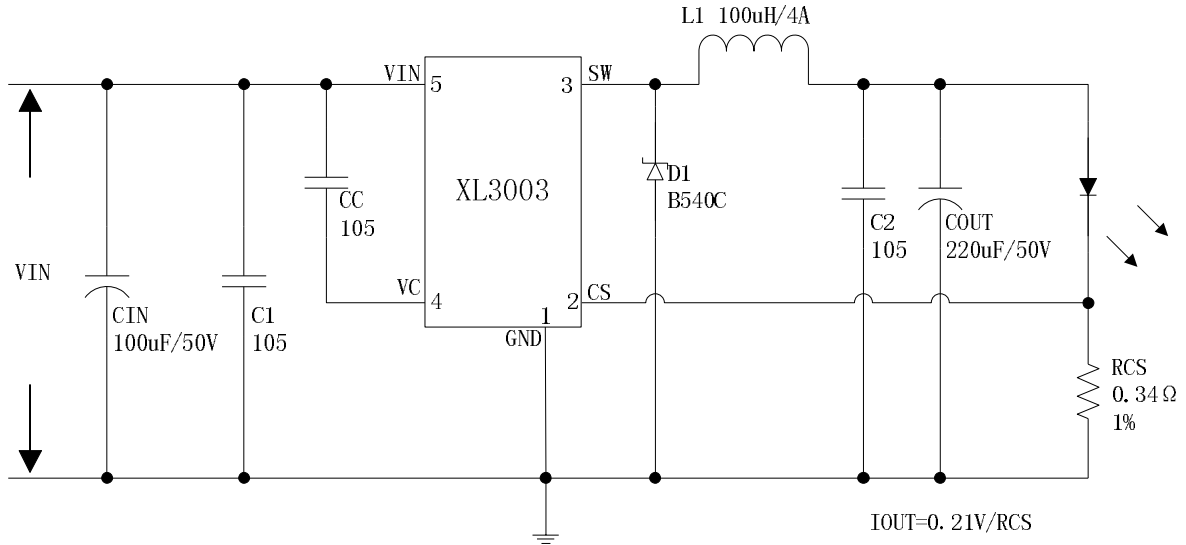


Figure15. XL3003 System Parameters Test Circuit (VIN=8V~36V, IOU=615mA)

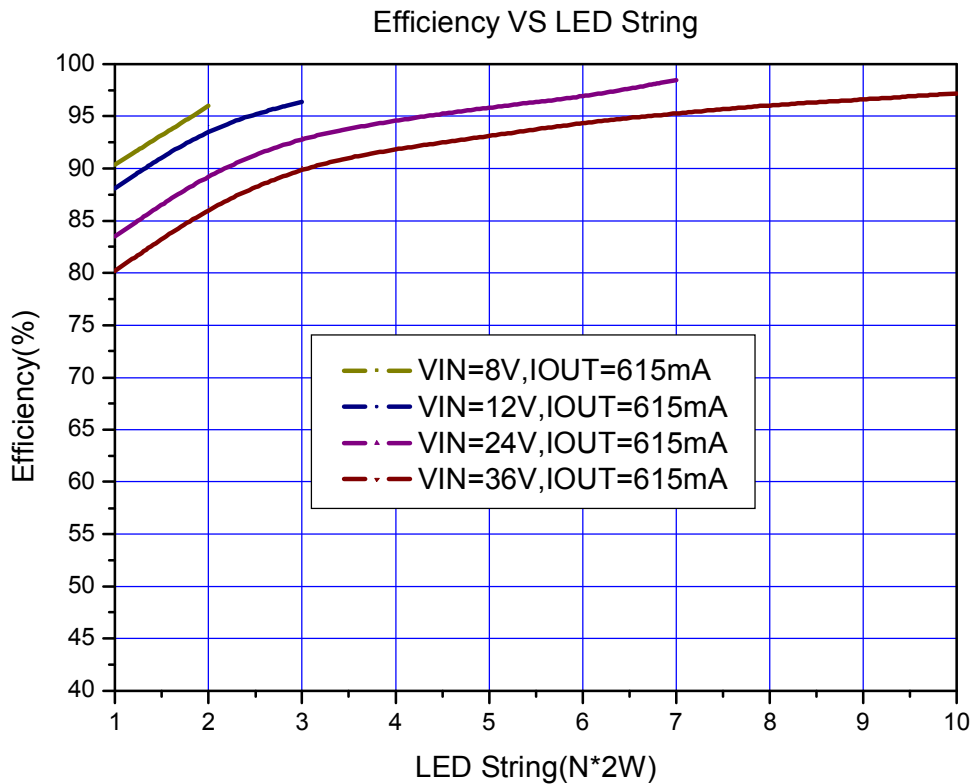


Figure16. XL3003 System Efficiency Curve

**4A 220KHz 36V Buck LED Constant Current Driver** **XL3003**

**Typical System Application (VIN=8V~36V, IOU=925mA)**

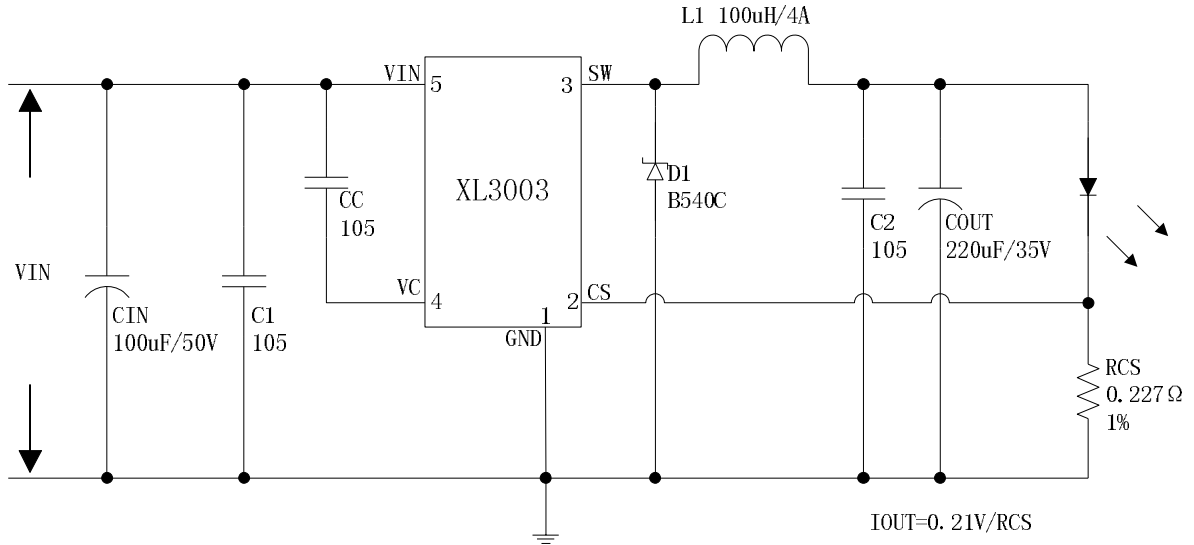


Figure17. XL3003 System Parameters Test Circuit (VIN=8V~36V, IOU=925mA)

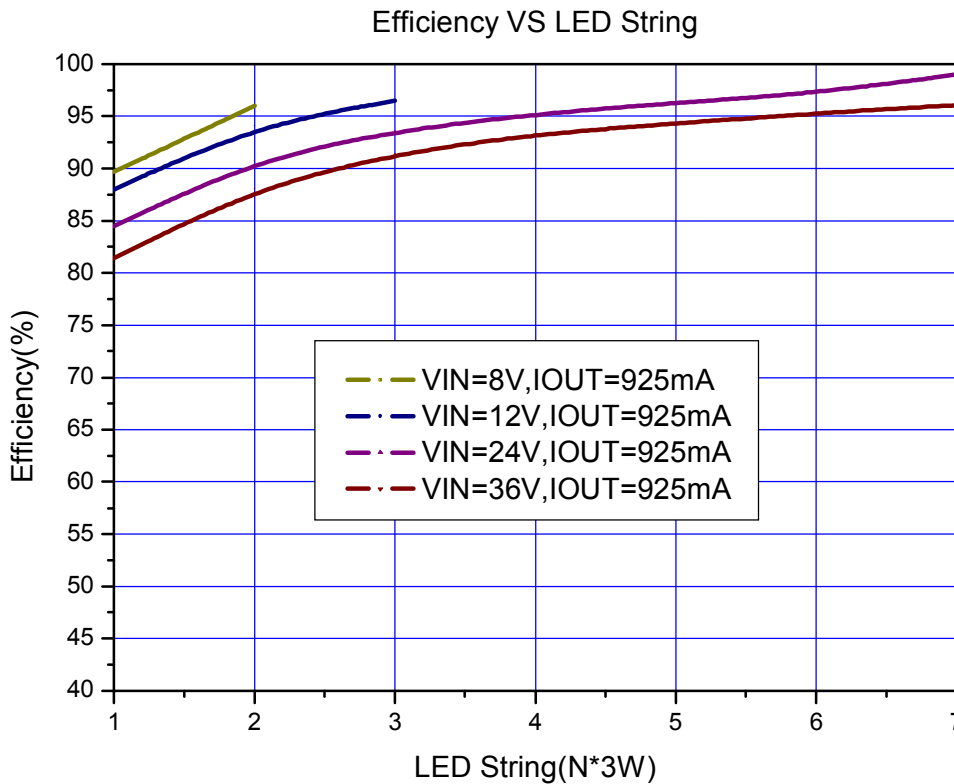


Figure18. XL3003 System Efficiency Curve

**Typical System Application (PWM DIMMING)**

PWM dimming function can be used in typical system application with external components. Changing the duty cycle of PWM signal can get different LED current. The PWM signal high voltage above 3.3V(referenced to ground, lower than VIN), Low voltage below 0.2V(referenced to ground).

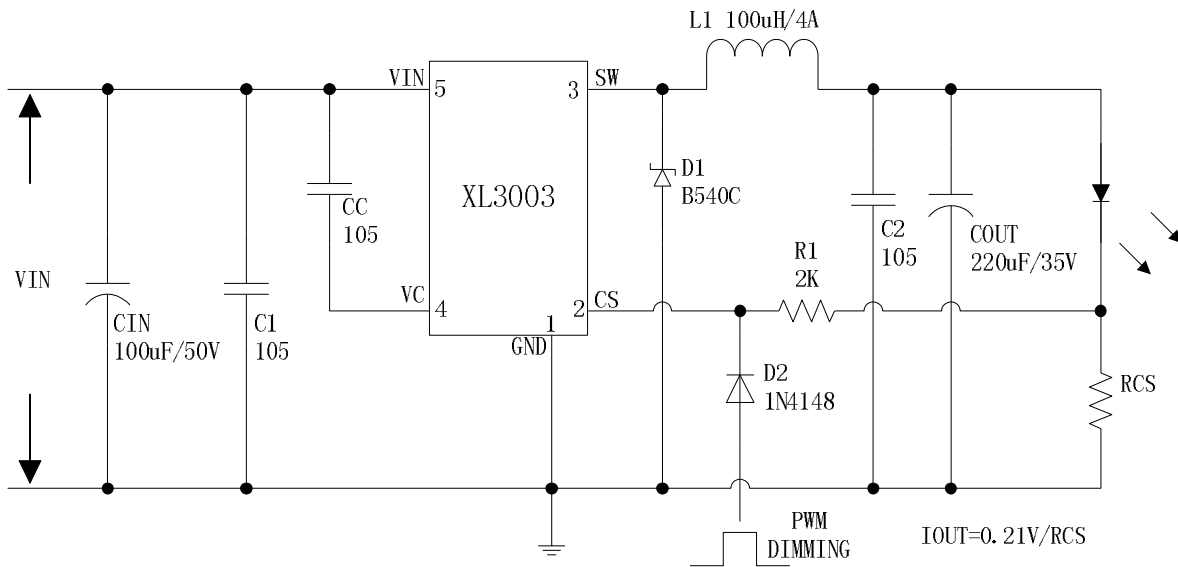


Figure19. XL3003 System Parameters Test Circuit (PWM DIMMING)



## 4A 220KHz 36V Buck LED Constant Current Driver

**XL3003**



### Schottky Diode Selection Table

| Current | Surface Mount | Through Hole | VR (The same as system maximum input voltage) |        |        |        |        |
|---------|---------------|--------------|---|--------|--------|--------|--------|
|         |               |              | 20V   | 30V    | 40V    | 50V    | 60V    |
| 1A      |               | √            | 1N5817  | 1N5818 | 1N5819 |        |        |
| 3A      |               | √            | 1N5820  | 1N5821 | 1N5822 |        |        |
|         |               | √            | MBR320  | MBR330 | MBR340 | MBR350 | MBR360 |
|         | √             |              | SK32  | SK33   | SK34   | SK35   | SK36   |
|         | √             |              |   | 30WQ03 | 30WQ04 | 30WQ05 |        |
|         |               | √            |   | 31DQ03 | 31DQ04 | 31DQ05 |        |
|         |               | √            | SR302   | SR303  | SR304  | SR305  | SR306  |
| 5A      |               | √            | 1N5823  | 1N5824 | 1N5825 |        |        |
|         |               | √            | SR502   | SR503  | SR504  | SR505  | SR506  |
|         |               | √            | SB520   | SB530  | SB540  | SB550  | SB560  |
|         | √             |              |   | 50WQ03 | 50WQ04 | 50WQ05 |        |
| 8A      |               | √            | SR820   | SR830  | SR840  | SR850  | SR860  |

**Package Information**  
TO252-5L

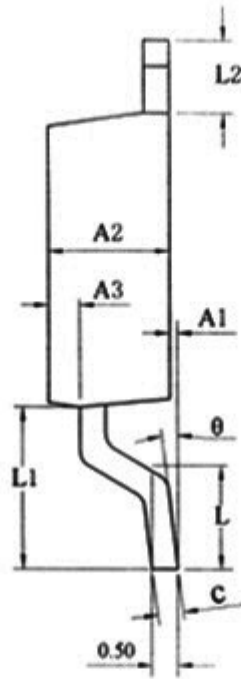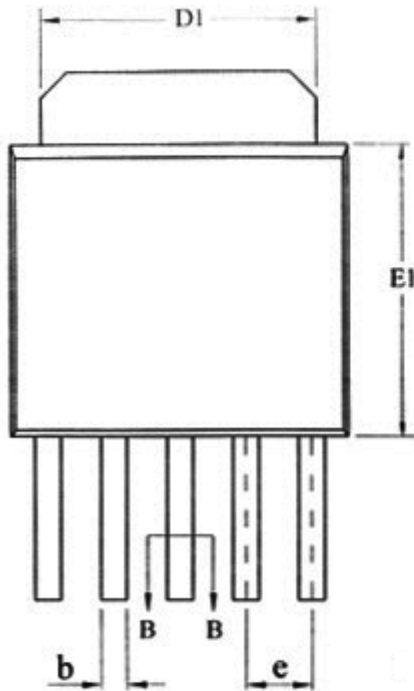

| SYMBOL | MILLIMETER |      |      |
|--------|------------|------|------|
|        | MIN        | NOM  | MAX  |
| A1     | 0.05       | 0.15 | 0.25 |
| A2     | 2.10       | 2.30 | 2.50 |
| A3     | 0.50       | 0.60 | 0.70 |
| b      | 0.46       | —    | 0.60 |
| b1     | 0.45       | 0.50 | 0.55 |
| c      | 0.49       | —    | 0.56 |
| c1     | 0.48       | 0.50 | 0.52 |
| D      | 6.30       | 6.50 | 6.70 |
| D1     | 5.30REF    |      |      |
| E1     | 5.30       | 5.50 | 5.70 |
| e      | 1.27BSC    |      |      |
| L      | 1.40       | 1.50 | 1.60 |
| L1     | 3.00       | 3.10 | 3.30 |
| L2     | 1.40BSC    |      |      |
| θ      | 0          | —    | 8°   |

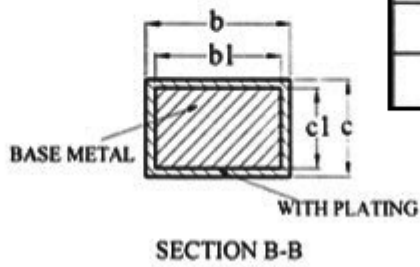

**Important Notice**

XLSEMI reserve the right to make modifications, enhancements, improvements, corrections or other changes without notice at any time. XLSEMI does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. XLSEMI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using XLSEMI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards. XLSEMI warrants performance of its products to the specifications applicable at the time of sale, in accordance with the warranty in XLSEMI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent XLSEMI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed. For the latest product information, go to [www.xlsemi.com](http://www.xlsemi.com).